

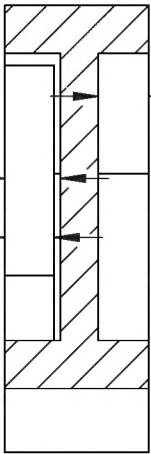


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
6		AS DRAWN BY CANAM	7/22/2013	CFS	
7	14-0101	CH'D TITLE BLOCK WAS RED BARN IS DART. ADDED MACHINE ENGRAVE NOTE. CH'D DIMENSION TOLERANCES ON NON-CRITICAL DIMENSIONS.	7/30/2014	DJN	RW
8	16-0155	CH'D DIMS WAS .875 IS 4X .875, WAS 4X Ø.500 THRU IS 4X Ø.500 +.005 -.000 THRU ALL. DELETED DIM .875. ADDED DIMS 2X Ø.2510-.2516 THRU ALL, 1.729, (8.862), 7.1330±.0005.	9/30/2016	DPD	JAG

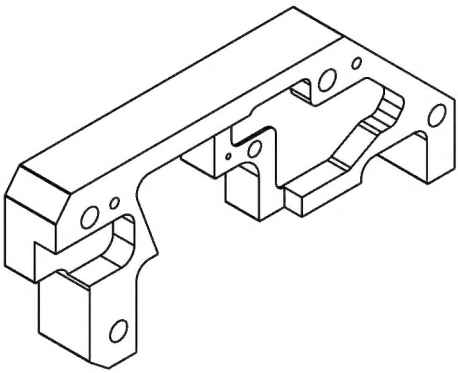

SECTION A-A

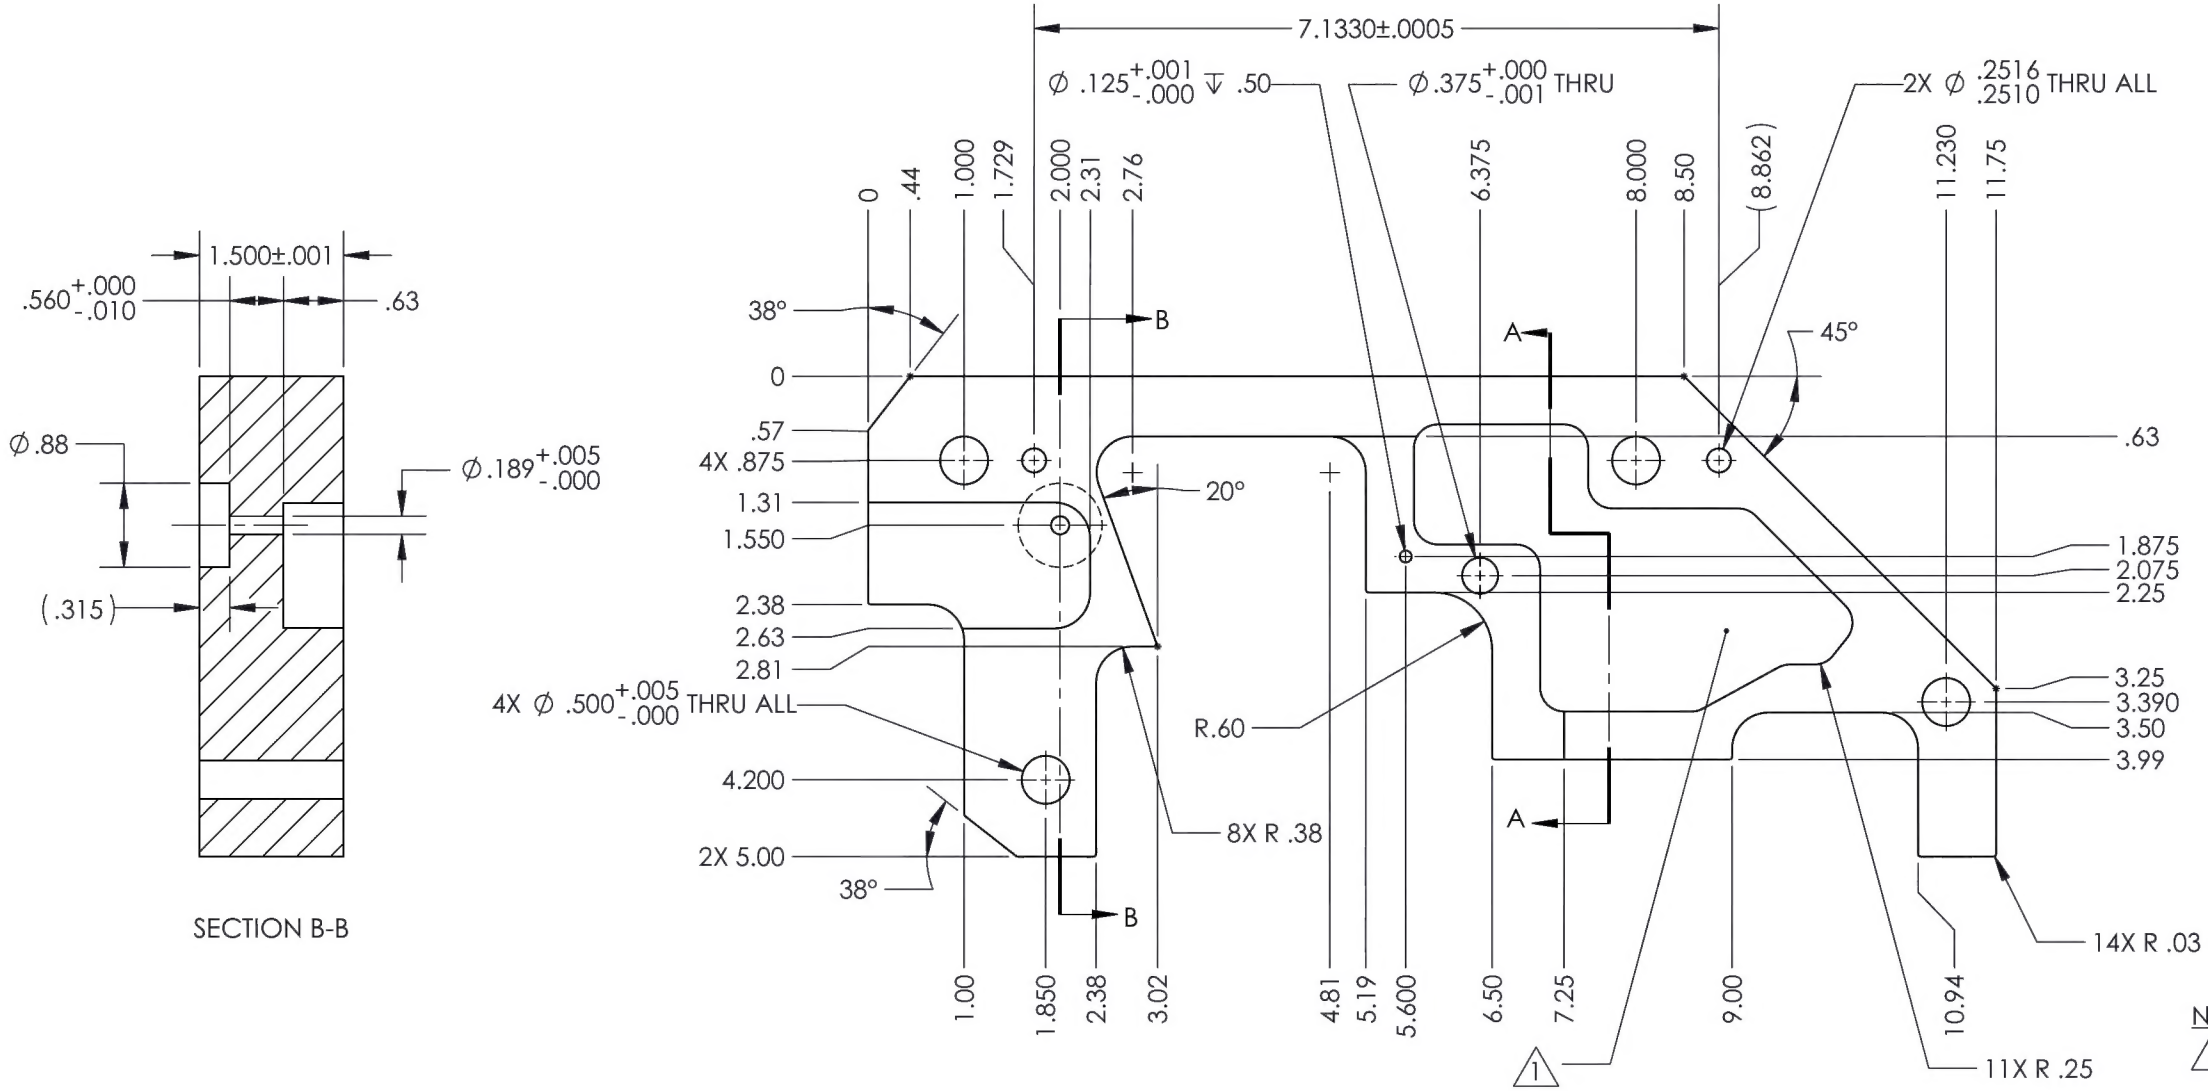

SECTION B-B

**NOTES:**

- 1. MACHINE ENGRAVE BATCH NUMBER.
- 2. ANODIZE GOLD FOR 20NR, ANODIZE BLUE FOR 8NR.

USED ON	
20NR	
8NR	

**TITLE**  
SPACER

**DWG NO.** 20NR-10 **REV** 8

MAT'L 6061	<b>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES</b> XXX ± .005 FRACTIONS ± 1/8 .XX ± .01 ANGLES ±.5° .X ± .1 SURFACES = 125°✓
HEAT TREAT	
FINISH SEE NOTE 2	
SPEC MIL-A-8625F, TYPE II, CLASS II	
DRAWN BY: CANAM	1. BREAK ALL SHARP EDGES .015 x 45° OR .015R
CHECKED: CLOUGH	2. DIMENSIONAL LIMITS APPLY AFTER PLATING
OPPS APPR: ANDERSON	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
QA APPR: LINDSAY	USED ON MODEL
APPROVED: GILBERT	
SCALE 1:2	DATE 12/1/1995
SHEET 1 OF 1	

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS
			20NR-10	1	SPACER	6061	